THE FACTORY AUTOMATION COMPANY

FANUC

Experience more Collaborative robots for a wide range of applications

MORE choices MORE payload MORE reach MORE control

Why settle for less when you can get MORE?

FANUC's CR series of collaborative robots offers more choices, more payload, more reach and more speed than any other cobot series on the market. Safety-certified, FANUC cobots work hand in hand with humans to add value to your processes. Covering the needs of medium- and small-sized businesses as well as automation beginners and large corporations, the range contains exactly the right solution for your business.

More choices for more businesses

Do you run a small- or medium-sized company and have never thought about automation? If so, FANUC cobots provide you with just the opportunity you are looking for. Quick to install, easy to use and offering unrivalled reliability, they represent a lasting solution that boosts your productivity and provides you with new growth opportunities. They also offer a safe return on investment. Let our experts advise you on exactly the right automation solution for your needs!

FANUC cobots stop at a touch and restart at the push of a button. Convenient hand guidance functionality also makes adapting to different applications very straightforward.


Easy to work with

Either break from traditional programming with the FANUC Hand Guidance function or do your programming with FANUC's new *i*HMI guides.

FANUC Hand Guidance allows you to teach your collaborative robot by leading it through paths as well as to lift heavy objects manually. FANUC's new *i*HMI, on the other hand, provides you with a step-by-step guide to setting up CR series cobots and creating programs, not to mention other wizards and tutorials to help new users.

MORE performance and **MORE** capability

Offering payloads of 4 kg, 7 kg, 14 kg, 15 kg and 35 kg and unrivalled reach, the CR series is ideally suited to handling processes that expose human workers to the risk of repetitive strain and other work-related injuries. Since FANUC cobots control force with much more precision than humans, they also offer you huge benefits in terms of quality and repeatability.





CR-7iA Payload: 7 kg Reach: 717 mm CR-7iA/L Payload: 7 kg Reach: 911 mm CR-14iA/L Payload: 14 kg Reach: 911mm **CR-15***i***A** Payload: 15 kg Reach: 1441 mm **CR-35***i***A**

More payloads – up to 35 kg



With just the right payload for your application in its range, only FANUC offers 6 models with payloads from 4 kg up to a world-beating 35 kg. Plus, the FANUC CR-35*i*A is still the strongest cobot on the market.



More reach – up to 1831 mm

FANUC's cobots are available with reaches of 550, 717, 911, 1441 and 1813 mm – all with a 360° work envelope.



Payload: 35 kg Reach: 1813 mm

More speed – up to 1500 mm/sec

To ensure safety, cobots limit force and momentum by operating at lower speeds than other types of robots. However, thanks to safety monitoring, FANUC CR models reach speeds of up to 1500 mm per second.

MORE freedom and flexibility

The FANUC CR series can work side by side with humans or collaborate with them without the need for external safety devices. As a result, you enjoy better versatility and work ergonomics, benefit from flexible mounting options and save valuable production space.

ISO-certified safe to work with people

The ISO 10218 and ISO 13849 Cat. 3 Pld. certified CR series is equipped with ultra-safe FANUC contact stop protection based on proven sensor technology. All robots restart easily and quickly after a contact stop. In addition to contact stop, the CR series comes with push back and anti-trap functions for additional protection. To prevent the risk of pinching, the larger CR-35*i*A model comes wrapped in a passive soft cover. What is more, customisable speed and safety settings help you adapt each collaborative robot exactly to your specific application.



Dual Check Safety (DCS)

DCS is a safety system that monitors position and speed. It is a proven technology used on many standard FANUC robots. On the CR series, third-party safety equipment can be connected to DCS to provide an additional level of safety and increase productivity.



NUC SSC OR TIME

Fla Fo CF



Flexible mounting options

For more flexible layouts, all models except the CR-35*i*A can be upside-down mounted, wall mounted or fixed to a mobile platform or a rail.

MORE control

Break away from traditional programming! The FANUC Hand Guidance function is available for all FANUC collaborative robots. Depending on the model, it allows you to teach your collaborative robot by leading it through paths or to use it to lift heavy objects weighing up to 35 kg.

Easy teaching without programming

Teach your FANUC collaborative robot easily by leading it through paths and points. Hand guidance is easy and intuitive and eliminates the need for a pendant to teach positions. It also keeps your training costs low and saves you valuable time.

Hand guidance for easy manual handling

Using hand guidance, FANUC cobots can be used to pick up and carry heavy objects. Taking the strain off human operators on one-off operations, this is easily done by guiding the robot arm and tooling by hand to the right point, picking up and carrying the workpiece using hand guidance.



Hand Guidance model for all CR series models

- plug and play functionality with easy-to-attach joystick
- compact lightweight design
- wireless communication via *i*Pendant



Hand Guidance model for CR-35*i*A

- collaborative handling during robot operation
- ISO-10218-compliant with enabling switch and emergency button
- equipped with FS-15*i*A sensor
- user-friendly handle mounted on robot wrist
- handle ensures easy control of robot and reduces training time



Easy programming with *i*HMI

FANUC's *i*HMI user interface offers ample processing power and clear high-resolution screen displays. To make operating your cobots as easy as possible, it can display setup, programming guides and tutorials on the main home page. By using the programming guide, even first-time robot users can create a program for simple handling tasks and execute it in just 30 minutes. Easier usage also facilitates system setup and maintenance to improve efficiency.



MORE reliability

All FANUC's CR series robots use proven FANUC technology and a familiar interface. As a result, the CR series operates like any other FANUC robot with exactly the same high degree of reliability, uptime, dexterity and world class +/- 0.01-0.03 mm repeatability.

More features

With more than 250 software features, FANUC's latest R-30*i*B Plus controller guarantees the best processing speed and robot performance for every FANUC cobot. Designed for increased user-friendliness and minimal energy consumption, the R-30*i*B Plus comes in five different cabinets to help you make the most of your floor space and production cell layouts.

Proven technology

For more reliability, all FANUC cobots are based on proven LR Mate and M-20 technology. They offer good repeatability and come with the standard FANUC interface for easy learning, programming and setup. As a result, no extensive retraining is necessary. Application scenarios can be modelled easily using ROBOGUIDE simulation software. FANUC cobots are customisable and include a large number of options. They are also backed by full spare parts availability, global service and support.



FANUC R-30*i*B Plus controller





Discover the wide range of collaborative opportunities

If you want to combine the strength, precision and repeatability of a robot with human know-how and manual dexterity, collaborative robots make the best choice – by working hand in hand, humans and robots can add real value to your processes. No need for safety fences – FANUC collaborative robots allow easy integration into human workspaces for even more efficiency and improved health and safety.

ASSEMBLING

Preventing the risk of repetitive strain injuries amongst assembly line workers, the CR series will lift and position heavy components on machining and assembly lines. The repeatability offered by using a collaborative robot for these processes also improves quality and reduces cycle times. **Benefits: Higher output, more speed and improved quality**

MACHINE TENDING

The CR series is ideally suited to those machine tending applications that frequently require an operator's presence. Benefits: Maximised efficiency, better quality, more throughput and improved performance

MOBILE PLATFORM

Automated guided vehicles (AGVs) work effectively with CR series robots and humans and provide an effective means of enhancing applications such as workpiece transfer on your CR production line. Benefits: Enhanced flexibility thanks to the mobility of the cobot

HAND GUIDANCE

Available on the CR series robot, FANUC Hand Guidance allows you to forgo traditional programming and teach your collaborative robot by leading it along motion paths. It also enables you to use your robot to lift heavy objects weighing up to 35 kg. **Benefits: Reduced training costs and saving of valuable time**

SEALING & DISPENSING

Whether they are used to apply sealants, adhesives,

paints or other fluids, CR series robots work safely

next to humans across a range of industries.

American

Benefits: Reduce waste and increase accuracy

PART INSPECTION & TESTING

During part inspection, robots take over dull tasks where highprecision is required. Equipped with smart vision accessories, the CR series is ideally suited to perform a quality control (here microwaves) and, thanks to flexible mounting options, a CR cell can be designed to meet your requirements exactly. **Benefits: Better repeatability and consistently high levels of product quality**

PICKING WITH DUAL CHECK SAFETY (DCS)

FANUC Dual Check Safety (DCS) is a smart, integrated software solution that monitors position and speed. It keeps operators, robots and tooling completely safe. With no need to invest in expensive space-taking safety equipment, it also helps keep the space required for robot cells to a minimum. **Benefits: Space-saving and cost-effective**

PICKING, PACKAGING, PALLETISING On packaging and palletising lines, the CR series can be used to carry out dull, repetitive, dirty and dangerous handling tasks, freeing up staff to perform more

complex and diversified jobs requiring human skills. Benefit over yellow robot: The CR provides operator safety, and a human can remove the first full pallet while the robot continues to fill the second

PICK & PLACE

For high-speed precision applications such as pick and place, it makes a lot of sense to integrate other FANUC robots such as the SCARA and LR Mate into your collaborative workforce. **Benefit: Integrated vision and linetracking from one supplier**

MORE possibilities

As with all FANUC robots, FANUC's collaborative robot series can be equipped with any of FANUC's intelligence functions - made by FANUC, developed specifically for FANUC robots, to give you more possibility for automating with cobots. Intelligence-ready functions include FANUC *i*RVision, 3D vision with FANUC 3D Vision Sensor, FANUC Force Sensors and much more.



3D bin picking

Opening up a wealth of possibilities, the 3D Vision Sensor even enables robots to detect randomly piled parts including shiny, multicoloured or semi-transparent items. Attached to the robot arm or a gantry, the FANUC 3D Vision Sensor is easy to set-up using the *i*Pendant handheld controller or PC.



Recognition, reading and sorting

Using the Vision Sensor, the CR series is capable of locating workpieces, reading bar codes and sorting by colour.




A sense of touch


FANUC Force Sensor detects force and torque applied to the end effector, allowing the robot to carry out collaborative assembly, fitting and weighing operations for example.


MORE information

Technical data CR series

Specifications	CR-4 <i>i</i> A	CR-7 <i>i</i> A	CR-7 <i>i</i> A/L	CR-14iA/L	CR-15 <i>i</i> A	CR-35 <i>i</i> A
Type: articulated	•	•	•	•	•	•
Controlled axes	6	6	6	6	6	6
Max. load capacity at wrist [kg]	4	7	7	14	15	35
Reach [mm]	550	717	911	911 *1)	1441	1813
Repeatability [mm] *2)	±0.01	±0.01	±0.01	±0.01	±0.02	±0.03
Mass [kg] *2)	48	53	55	55	255	990
Installation: floor upside down wall *3]	• • •	• • •	• • •	• • •	• • •	• - -
Motion range						
J1 axis rotation [°]	340	340	340	340	340	370
J2 axis rotation [°]	150	166	166	166	180	165
J3 axis rotation [°]	354	373	383	383	305	258
J4 axis wrist rotation [°]	380	380	380	380	380	400
J5 axis wrist swing [°]	200	240	240	240	280	220
J6 axis wrist rotation [°]	720	720	720	720	900	900
Max. speed [mm / s] ^{*4]}	1000 *5)	1000 *5)	1000 *5)	500 ^{*4]}	800 / 1500 ^{*6]}	750 ^{*5)}
Allowable load moment at wrist						
J4 axis [Nm]	8.86	16.6	16.6	31.0	26.0	110
J5 axis [Nm]	8.86	16.6	16.6	31.0	26.0	110
J6 axis [Nm]	4.9	9.4	9.4	13.4	11.0	60
Allowable load inertia at wrist						
J4 axis [kgm²]	0.2	0.47	0.47	0.66	0.90	4
J5 axis [kgm²]	0.2	0.47	0.47	0.66	0.90	4
J6 axis [kgm²]	0.067	0.15	0.15	0.30	0.30	1.5
Installation environment						
Acoustic noise level [dB]	64.7	64.7	64.7	64.7	< 70	< 70
Ambient operating temperature [°C]	0–45	0–45	0-45	0–45	0–45	0-45
Protection						
Body standard/optional	IP67	IP67	IP67	IP67	IP54	IP54
Wrist & J3 arm standard/optional	IP67	IP67	IP67	IP67	IP67	IP67

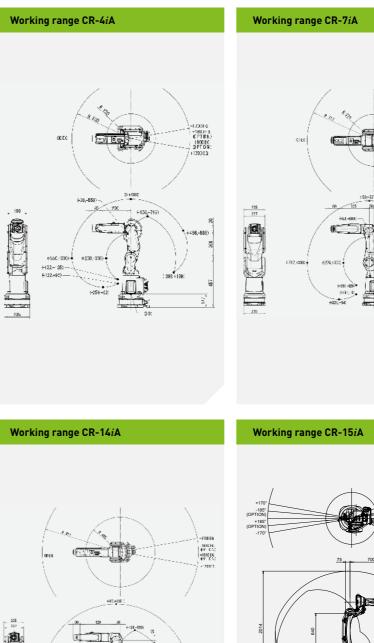





standard

*1) 911mm (load capacity < 12 kg) - 820 mm (load capacity >12 kg)

*2) ISO 9283


*3) In case of the wall mount, the operation space will be restricted according to the payload.


*4) In case of short distance motion, the speed may not reach the maximum value stated.

*5) It is necessary to set a motion speed according to risk assessment of system considering pinching with the surroundings.


*6) If the area is monitored by a safety sensor (located separately).

Working range CR-7*i*A/L





Working range CR-35*i*A



MORE confidence

With FANUC, you benefit from efficient FANUC service worldwide. Wherever you need us, our comprehensive FANUC network provides sales, support and customer service all around the world. That way, you can be sure you have always got a local contact that speaks your language.





Lifetime OEM spare parts

As long as your machine is in service, we will provide you with original spare parts – for a minimum of 25 years.

Efficient training

The FANUC Academy offers everything you need to upskill your teams and increase productivity – from introductory programs for beginners to courses tailored to the needs of expert users and specific applications.





One common servo and control platform -Infinite opportunities THAT's FANUC!

2

FA

CNCs, Servo Motors and Lasers

ROBOTS

WWW.FANUC.EU

Industrial Robots, Accessories and Software

ROBOCUT **CNC** Wire-Cut

Machines

Electric Discharge Centres

ROBODRILL

Compact CNC Machining

ROBOSHOT

Electric CNC Injection Moulding Machines

ROBONANO

Ultra Precision Machine